

SUNY POTSDAM
BARRINGTON STUDENT UNION
SUMMARY OF ASBESTOS SAMPLES AND ANALYSIS RESULTS

Sample Number	Type of Sample	Location of Sample	Asbestos Content
Ambient Sampling Event January 25, 2011			
Ambient Project# 101214AB			
003-01	Mudded Fitting	Kitchen 2 nd Floor	NAD
003-02	Mudded Fitting	Kitchen 2 nd Floor	NAD
003-03	Mudded Fitting Debris	Kitchen 2 nd Floor	NAD
Ambient Sampling Event April 13, 2011			
Ambient Project# 110325AB			
01-01	Glazing	Exterior Door	Trace Chrysotile
01-02	Glazing	Exterior Door	Trace Chrysotile
02-01	Caulking	Exterior Door	1.6% Tremolite 0.4% Chrysotile
02-02	Caulking	Exterior Door	NA/PS
Ambient Sampling Event June 3, 2011			
Ambient Project# 110601AA			
004-01	Vapor Barrier	Main Bldg. Vestibule – Center	NAD
004-02	Vapor Barrier	Main Bldg. Vestibule – Center	NAD
Ambient Sampling Event June 16, 2011			
Ambient Project# 110601AA			
006-01	Red Interior Window Caulk	2 nd Floor Main Vestibule	NAD
006-02	Red Interior Window Caulk	2 nd Floor Main Vestibule	NAD
007-01	Red Exterior Window Caulk	2 nd Floor Main Vestibule	NAD
007-02	Red Exterior Window Caulk	2 nd Floor Main Vestibule	NAD
008-01	Concrete Ceiling	2 nd Floor Exterior Overhang	NAD
008-02	Concrete Ceiling	2 nd Floor Exterior Overhang	NAD
008-03	Concrete Ceiling	2 nd Floor Exterior Overhang	NAD
008-04	Concrete Ceiling	2 nd Floor Exterior Overhang	NAD
008-05	Concrete Ceiling	2 nd Floor Exterior Overhang	NAD
008-06	Concrete Ceiling	2 nd Floor Exterior Overhang	NAD
008-07	Concrete Ceiling	2 nd Floor Exterior Overhang	NAD
009-01	Plaster Coat	Exterior Overhang	NAD
009-02	Plaster Coat	Exterior Overhang	NAD
009-03	Plaster Coat	Exterior Overhang	NAD
009-04	Plaster Coat	Exterior Overhang	NAD
009-05	Plaster Coat	Exterior Overhang	NAD
009-06	Plaster Coat	Exterior Overhang	NAD

SUNY POTSDAM
BARRINGTON STUDENT UNION
SUMMARY OF ASBESTOS SAMPLES AND ANALYSIS RESULTS

Sample Number	Type of Sample	Location of Sample	Asbestos Content
009-07	Plaster Coat	Exterior Overhang	NAD
Ambient Sampling Event July 21, 2011 Ambient Project# 110718AA			
01-01	Spray-On	East Entryway	NAD
01-02	Spray-On	North Entryway	NAD
01-03	Spray-On	West Entryway	NAD
Ambient Sampling Event December 6, 2011 Ambient Project# 111202AA			
Bathrooms			
010-01	2x2 Ceramic Floor Tile	Room 121 Hall	NAD
010-02	2x2 Ceramic Floor Tile	Room 120 Hall	NAD
011-01	2x2 Ceramic Floor Tile Grout	Room 121 Hall	NAD
011-02	2x2 Ceramic Floor Tile Grout	Room 120 Hall	NAD
012-01	Brown Popcorn Ceiling	Room 120 Hall	NAD
012-02	Brown Popcorn Ceiling	Room 207 Hall	NAD
012-03	Brown Popcorn Ceiling	Room 121 Hall	NAD
013-01	Brown 1x1 Ceramic Floor Tile	Room 122A Women	NAD
013-02	Brown 1x1 Ceramic Floor Tile	Room 123A Men	NAD
014-01	Brown 1x1 Floor Tile Grout	Room 122 Women	NAD
014-02	Brown 1x1 Floor Tile Grout	Room 123A Men	NAD
015-01	12x12 Terracotta Floor Tile	Room 207 Hall	NAD
015-02	12x12 Terracotta Floor Tile	Room 206 Hall	NAD
016-01	Yellow Floor Tile Mastic	Room 207 Hall	NAD
016-02	Yellow Floor Tile Mastic	Room 206 Hall	NAD
017-01	Yellow Carpet Mastic	Room 207 Hall	NAD
017-02	Yellow Carpet Mastic	Room 207 Hall	NAD
018-01	Black 6" Cove Base	Room 206 Hall	NAD
018-02	Black 6" Cove Base	Room 207 Hall	NAD
019-01	Yellow Cove Base Mastic	Room 206 Hall	NAD
019-02	Yellow Cove Base Mastic	Room 207 Hall	NAD
020-01	White 3x3 Ceramic Wall Tile	Room 125 Women	NAD
020-02	White 3x3 Ceramic Wall Tile	Room 231 Women	NAD
021-01	White 3x3 Ceramic Wall Tile Grout	Room 125 Women	NAD

SUNY POTSDAM
BARRINGTON STUDENT UNION
SUMMARY OF ASBESTOS SAMPLES AND ANALYSIS RESULTS

Sample Number	Type of Sample	Location of Sample	Asbestos Content
021-02	White 3x3 Ceramic Wall Tile Grout	Room 231 Women	NAD
022-01	Plaster Wall Skim	Room 226 Women	NAD
022-02	Plaster Wall Skim	Room 207 Hall	NAD
022-03	Plaster Wall Skim	Room 121 Hall	NAD
022-04	Plaster Wall Skim	Room 125 Women	NAD
022-05	Plaster Wall Skim	Room 123 Men	NA
022-06	Plaster Wall Skim	Room 123 Men	NAD
023-01	Plaster Wall Base	Room 226 Women	NAD
023-02	Plaster Wall Base	Room 207 Hall	NAD
023-03	Plaster Wall Base	Room 121 Hall	NAD
023-04	Plaster Wall Base	Room 125 Women	NAD
023-05	Plaster Wall Base	Room 123 Men	NAD
024-01	Sheetrock	Room 120 Hall	NAD
024-02	Sheetrock	Room 120 Hall	NAD
025-01	Vinyl Wall Paper	Room 207 Hall	NAD
025-02	Vinyl Wall Paper	Room 121 Hall	NAD
026-01	Plaster Ceiling Skim	Room 231 Women	NAD
026-02	Plaster Ceiling Skim	Room 124 Men	NAD
026-03	Plaster Ceiling Skim	Room 123 Men	NAD
027-01	Plaster Ceiling Base	Room 231 Women	NAD
027-02	Plaster Ceiling Base	Room 124 Men	NAD
027-03	Plaster Ceiling Base	Room 123 Men	NAD
028-01	White Caulk	Room 231 Women Vanity	NAD
028-02	White Caulk	Room 226 Women Vanity	NAD
Ambient Sampling Event March 1, 2012 Ambient Project# 120229AB			
001-01	2x4 Drop Ceiling Tile – White w/ moderate horizontal fissures	Room 219	NAD
001-02	2x4 Drop Ceiling Tile – White w/ moderate horizontal fissures	Hall Adjacent to Mailroom	NAD
002-01	2x4 Drop Ceiling Tile – White w/ large and deep horizontal fissures	College Store – Storage	NAD
002-02	2x4 Drop Ceiling Tile –	College Store – Storage	NAD

**SUNY POTSDAM
BARRINGTON STUDENT UNION
SUMMARY OF ASBESTOS SAMPLES AND ANALYSIS RESULTS**

Sample Number	Type of Sample	Location of Sample	Asbestos Content
	White w/ large and deep horizontal fissures		
003-01	1x1 Splined Ceiling Tile	Room 215	NAD
003-02	1x1 Splined Ceiling Tile	Room 212	NAD
Ambient Sampling Event May 23, 2012 Ambient Project# 1200515AC			
029-01	Fitting Insulation	Large Diameter in Wet Wall	7.8% Chrysotile
029-02	Fitting Insulation	Large Diameter in Wet Wall	NA/PS
030-01	Fitting Insulation	1" Diameter in Wet Wall	8.7% Chrysotile
030-02	Fitting Insulation	1" Diameter in Wet Wall	NA/PS
030-03	Fitting Insulation	1" Diameter Debris in Wet Wall	NA/PS
031-01	Fitting Insulation	Above Ceiling @ Panel Access	NAD
031-02	Fitting Insulation	Above Ceiling @ Panel Access	NAD
Ambient Sampling Event July 10, 2012 Ambient Project# 120709AB			
001-01	Ceiling Base	Exterior Overhang – Front Entrance	NAD
001-02	Ceiling Base	Exterior Overhang – Front Entrance	NAD
001-03	Ceiling Base	Exterior Overhang – Front Entrance	NAD
002-01	Ceiling Finish	Exterior Overhang – Front Entrance	NAD
002-02	Ceiling Finish	Exterior Overhang – Front Entrance	NAD
002-03	Ceiling Finish	Exterior Overhang – Front Entrance	NAD
003-01	Caulk	Inside/Outside Front Entrance Overhang	NAD
003-02	Caulk	Inside/Outside Front Entrance Overhang	NAD
Ambient Sampling Event December 20, 2012 Ambient Project# 121221AG			
001-01	12x12 Orange VFT	2 nd Floor Bathroom	NAD
001-02	12x12 Orange VFT	2 nd Floor Bathroom	NAD
002-01	12x12 Mastic	2 nd Floor Bathroom	NAD
002-02	12x12 Mastic	2 nd Floor Bathroom	NAD
003-01	Debris on Floor	3 rd Floor Mechanical Room	NAD

SUNY POTSDAM
BARRINGTON STUDENT UNION
SUMMARY OF ASBESTOS SAMPLES AND ANALYSIS RESULTS

Sample Number	Type of Sample	Location of Sample	Asbestos Content
003-02	Debris on Floor *	3 rd Floor Mechanical Room	30.8% Chrysotile
003-03	Debris on Floor *	3 rd Floor Mechanical Room	NA/PS
Ambient Sampling Event February 26, 2013 Ambient Project #: 130222AA			
032-01	Debris- Mud Joint Packing	3 rd Floor Mechanical Room	NAD
032-02	Debris- Mud Joint Packing	3 rd Floor Mechanical Room	NAD
Ambient Sampling Event March 7, 2013 Ambient Project #: 130307AA			
001-01	Cementious Debris	Kitchen Ramp	NAD
001-02	Cementious Board	Kitchen Ramp Door	NAD
001-03	Cementious Board	Kitchen Ramp Door	NAD
002-01	Sheetrock	2 nd Floor MPR	NAD
002-02	Sheetrock	2 nd Floor MPR	NAD
003-01	Joint Compound	2 nd Floor MPR	NAD
003-02	Joint Compound	2 nd Floor MPR	NAD
Ambient Sampling Event March 21, 2013 Ambient Project #: 130320AA- BASEMENT			
01-01	Insulation	Steam Line-Basement	12.5% Amosite Trace Chrysotile
01-02	Insulation	Steam Line-Basement	NA/PS
01-03	Insulation	Steam Line-Basement	NA/PS
02-01	Mudded Fitting	Non Leaking Pipe-Basement	NAD
02-02	Mudded Fitting	Non Leaking Pipe-Basement	NAD
02-03	Mudded Fitting	Non Leaking Pipe-Basement	NAD
03-01	Mudded Fitting	Leaking Pipe-Basement	NAD
03-02	Mudded Fitting	Leaking Pipe-Basement	NAD
03-03	Mudded Fitting	Leaking Pipe-Basement	NAD
04-01	Mudded Fitting	Chilled Water Supply Elbow	NAD
04-02	Mudded Fitting	Chilled Water Supply Elbow	NAD
04-03	Mudded Fitting	Chilled Water Supply Elbow	NAD
05-01	Mudded Fitting	Chilled Water Return Elbow	NAD
05-02	Mudded Fitting	Chilled Water Return Elbow	NAD
05-03	Mudded Fitting	Chilled Water Return Elbow	NAD
06-01	Mudded Fitting	Sewer Drain Cleanout	1.3% Amosite
06-02	Mudded Fitting	Sewer Drain Cleanout	NA/PS

SUNY POTSDAM
BARRINGTON STUDENT UNION
SUMMARY OF ASBESTOS SAMPLES AND ANALYSIS RESULTS

Sample Number	Type of Sample	Location of Sample	Asbestos Content
06-03	Mudded Fitting	Sewer Drain Cleanout	NA/PS
07-01	Debris # 2 *	Debris pile #2	25.0% Amosite
07-02	Debris # 2 *	Debris pile #2	NA/PS
08-01	Debris #3 *	Debris pile #3	NAD
08-02	Debris #3 *	Debris pile #3	NAD
09-01	Debris #1 *	Debris pile #1	30.8% Amosite
09-02	Debris #1 *	Debris pile #1	NA/PS
Ambient Sampling Event March 26, 2013 Ambient Project #: 130320AA			
01-01	Fire Doors	East Entry to Post Office	30.8% Amosite
01-02	Fire Doors	East Entry to Post Office	26.7% Amosite
01-03	Fire Doors	2 nd Floor Kitchen Doors	30.8% Amosite
01-04	Fire Doors	2 nd Floor Kitchen Doors	23.5% Amosite
01-05	Fire Doors	2 nd Floor Center Hallway	17.4% Amosite
01-06	Fire Doors	2 nd Floor Center Hallway	17.4% Amosite
02-07	Blue Grey Floor Tile	1 st Floor Dining Area	NAD
02-08	Blue Grey Floor Tile	1 st Floor Dining Area	NAD
02-09	Green Floor Tile	1 st Floor Dining Area	NAD
02-10	Green Floor Tile	1 st Floor Dining Area	NAD
02-11	Green and Red Floor Tile	1 st Floor Dining Area	NAD
02-12	Green and Red Floor Tile	1 st Floor Dining Area	NAD
02-13	Black Floor Tile	1 st Floor Dining Area	NAD
02-14	Black Floor Tile	1 st Floor Dining Area	NAD
03-15	Cove Base	1 st Floor Dining Area	NAD
03-16	Cove Base	1 st Floor Dining Area	NAD
03-17	Tile Adhesive	1 st Floor Dining Area	NAD
03-18	Tile Adhesive	1 st Floor Dining Area	NAD
Ambient Sampling Event April 18, 2013 Ambient Project #: 130419AC			
01-01	Skimcoat - Wall	Center Hallway of Petes Place-2 nd Floor	NAD
01-02	Skimcoat - Wall	Center Hallway of Petes Place-2 nd Floor	NAD
01-03	Skimcoat - Wall	Center Hallway of Petes Place-2 nd Floor	NAD

SUNY POTSDAM
BARRINGTON STUDENT UNION
SUMMARY OF ASBESTOS SAMPLES AND ANALYSIS RESULTS

Sample Number	Type of Sample	Location of Sample	Asbestos Content
01-04	Skimcoat - Wall	Center Hallway of Petes Place-2 nd Floor	NAD
01-05	Skimcoat - Wall	Center Hallway of Petes Place-2 nd Floor	NAD
02-06	Plaster-Wall (Finish Coat)	Center Hallway of Petes Place-2 nd Floor	NAD
02-07	Plaster-Wall (Finish Coat)	Center Hallway of Petes Place-2 nd Floor	NAD
02-08	Plaster-Wall (Finish Coat)	Center Hallway of Petes Place-2 nd Floor	NAD
02-09	Plaster-Wall (Finish Coat)	Center Hallway of Petes Place-2 nd Floor	NAD
02-10	Plaster-Wall (Finish Coat)	Center Hallway of Petes Place-2 nd Floor	NAD
03-11	Wall Protector	Center Hallway of Petes Place-2 nd Floor	NAD
03-12	Wall Protector	Center Hallway of Petes Place-2 nd Floor	NAD
04-13	Floor - Tan Tile 12x12	East Lobby	NAD
04-14	Floor - Tan Tile 12x12	West Lobby	NAD
05-15	Floor - White Tile 12x12	East Lobby	NAD
05-16	Floor - White Tile 12x12	East Lobby	NAD
06-17	Floor - Grey Tile 12x12	West Lobby	NAD
06-18	Floor - Grey Tile 12x12	West Lobby	NAD
07-19	Floor Tile Adhesive (all colors)	East Lobby	NAD
07-20	Floor Tile Adhesive (all colors)	West Lobby	NAD
08-21	Cove Base	East Lobby	NAD
08-22	Cove Base	West Lobby	NAD
09-23	Cove Base Glue	East Lobby	NAD
09-24	Cove Base Glue	West Lobby	NAD
Ambient Sampling Event May 21, 2013 Ambient Project #: 130520AA Dining Hall⁽¹⁾			
01-01	Green Floor Tile	Outside West Entrance	NAD
02-02	Red Floor Tile	4' West of Counter	NAD

SUNY POTSDAM
BARRINGTON STUDENT UNION
SUMMARY OF ASBESTOS SAMPLES AND ANALYSIS RESULTS

Sample Number	Type of Sample	Location of Sample	Asbestos Content
03-04	White 9x9 Floor Tile	4' from North below Stage	NAD
03-03	White 9x9 Floor Tile	Center, below Stage	NAD
04-05	Yellow (9x9) Tile Adhesive	West end of Stage	NAD
04-06	Yellow (9x9) Tile Adhesive	6' from West end of Stage	NAD
05-07	Debris	West side of counter	NAD
05-08	Debris	West side of counter	NAD
Ambient Sampling Event May 29, 2013 Ambient Project #: 130520AA Basement Area 2			
B501-01	Mudded Fitting	Roof Drain	0.97% Amosite
B501-02	Mudded Fitting	Roof Drain	0.95% Amosite
B501-03	Mudded Fitting	Roof Drain	0.98% Amosite
B502-04	Mudded Fitting	Condensation Line	NAD
Ambient Sampling Event: January 6, 2014 Ambient Project # 140107AA Basement Mechanical			
0101-01	Mudded Fitting	Small Valve Mechanical Line 1	NAD

NAD – No asbestos detected

NA/PS – Not analyzed, positive stop. First sample in homogenous grouping positive.

NA – Not analyzed

* Samples collected as part of a contamination assessment to address an incidental disturbance in the basement. A site specific variance was developed and approved by NYSDOL. A contractor is scheduled to perform cleanup activities in April 2013.

⁽¹⁾ The floor tile samples collected on this date were part of an assessment for a potential incidental disturbance. The white 9x9 floor tile and mastic was discovered under the green and red floor tile (non asbestos containing) during a renovation. The green and red floor tile sampled on this date were just confirmatory samples for those previously collected on March 26, 2013 and found to be negative for asbestos. All results indicate that there was no asbestos disturbance in this area.

SUNY POTSDAM
BARRINGTON STUDENT UNION
ASBESTOS CONTAINING MATERIALS

Sample No.	Material Description	Sample Location	Asbestos %	Homogenous Locations	Condition	Friability	Qty*
02-01	Caulking	Exterior Door	1.6% Tremolite 0.4% Chrysotile	TBD	Good	Friable	<10 sq ft
029-01	Fitting Insulation	Large Diameter in Wet Wall	7.8% Chrysotile	TBD	Good	Friable	<10 sq ft
030-01	Fitting Insulation	1" Diameter in Wet Wall	8.7% Chrysotile	TBD	Good	Friable	<10 sq ft
003-02	Debris on Floor	3 rd Floor Mechanical Room	30.8% Chrysotile	TBD	Damaged	Friable	<10 sq ft
01-01	Fire Doors	East Entry to Post Office	30.8% Amosite	TBD	Damaged	Friable	60 sq ft
01-02	Fire Doors	East Entry to Post Office	26.7% Amosite	TBD	Damaged	Friable	60 sq ft
01-03	Fire Doors	2 nd Floor Kitchen Doors	30.8% Amosite	TBD	Damaged	Friable	50 sq ft
01-04	Fire Doors	2 nd Floor Kitchen Doors	23.5% Amosite	TBD	Damaged	Friable	50 sq ft
01-05	Fire Doors	2 nd Floor Center Hallway	17.4% Amosite	TBD	Damaged	Friable	60 sq ft
01-06	Fire Doors	2 nd Floor Center Hallway	17.4% Amosite	TBD	Damaged	Friable	60 sq ft
01-01	Insulation	Steam Line-Basement	12.5% Amosite Trace Chrysotile	TBD	Significantly Damaged	Friable	
06-01	Mudded Fitting	Sewer Drain Cleanout	1.3% Amosite	TBD	Significantly Damaged	Friable	
07-01	Debris # 2 **	Debris pile #2	25.0% Amosite	TBD	Significantly Damaged	Friable	
09-01	Debris #1 **	Debris pile #1	30.8% Amosite	TBD	Significantly Damaged	Friable	

* Quantities are only estimates and should be field verified.

* Quantities only reflect renovation areas and do not represent other homogeneous locations throughout the school.

Survey Date – Various

Page 1 of 1

SUNY Potsdam-Barrington Hall Student Union
Updated: January 13, 2014

** Samples collected as part of a contamination assessment to address an incidental disturbance in the basement. A site specific variance was developed and approved by NYSDOL. A contractor is scheduled to perform cleanup activities in April 2013.

Survey Date – Various

Page 1 of 1

SUNY Potsdam-Barrington Hall Student Union
Updated: January 13, 2014

**AmeriSci New York**

117 EAST 30TH ST.
NEW YORK, NY 10016
TEL: (212) 679-8600 • FAX: (212) 679-3114

PLM Bulk Asbestos Report

Ambient Environmental, Inc.
Attn: Joella Viscusi
12 Colvin Avenue

Albany, NY 12206

Date Received 01/08/14 AmeriSci Job # 214011479
Date Examined 01/08/14 P.O. #
ELAP # 11480 Page 1 of 1
RE: 140107AA; SUNY Potsdam; 44 Pierreponte Ave., Potsdam,
NY ; Barrington ; Basement Mechanical

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
01 0101	214011479-01 Location: Mudded Fitting / Small Valve Mech 1 Line	No	NAD (by NYS ELAP 198.1) by Ella Babayeva on 01/08/14
Analyst Description: Grey/Red, Heterogeneous, Fibrous, Bulk Material			
Asbestos Types:			
Other Material: Cellulose 10 %, Fibrous glass 35 %, Non-fibrous 55 %			

Reporting Notes:

Analyzed by: Ella Babayeva

*NAD/NSD =no asbestos detected; NA =not analyzed; NA/PS=not analyzed/positive stop; PLM Bulk Asbestos Analysis by EPA 600/M4-82-020 per 40 CFR 763 (NVLAP Lab Code 200546-0), ELAP PLM Method 198.1 for NY friable samples, which includes the identification and quantitation of vermiculite or 198.6 for NOB samples or EPA 400 pt ct by EPA 600/M4-82-020 (NY ELAP Lab ID11480); Note:PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. NAD or Trace results by PLM are inconclusive, TEM is currently the only method that can be used to determine if this material can be considered or treated as non asbestos-containing in NY State (also see EPA Advisory for floor tile, FR 59,146,38970,8/1/94) National Institute of Standards and Technology Accreditation requirements mandate that this report must not be reproduced except in full without the approval of the lab.This PLM report relates ONLY to the items tested. AIHA Lab # 102843, RI Cert#AAL-094, CT Cert#PH-0186, Mass Cert#AA000054.

Reviewed By: _____ END OF REPORT _____



PROJECT INFORMATION

PROJECT INFORMATION

BULK SAMPLE LOCATION


CHAIN OF CUSTODY

LAB INFORMATION


29. Ambient Project Manager:

32: Comments:

32: Comments:



MECHANICAL LEVEL

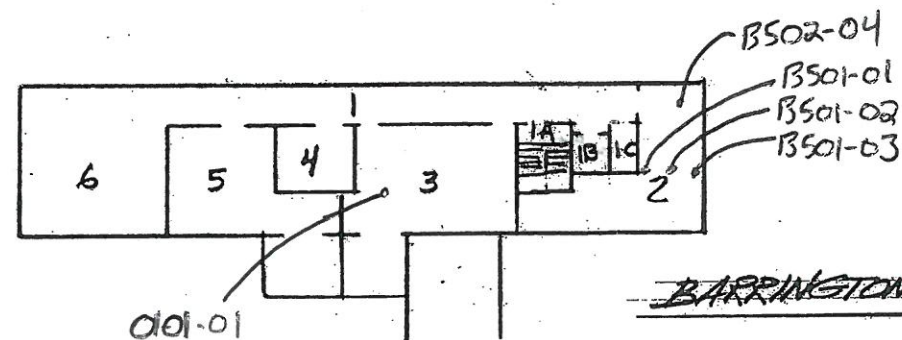

BARRINGTON STUDENT UNION


BASEMENT

BAR-SU 8/92

3/98


Bulk Sample Locations

- Sample locations

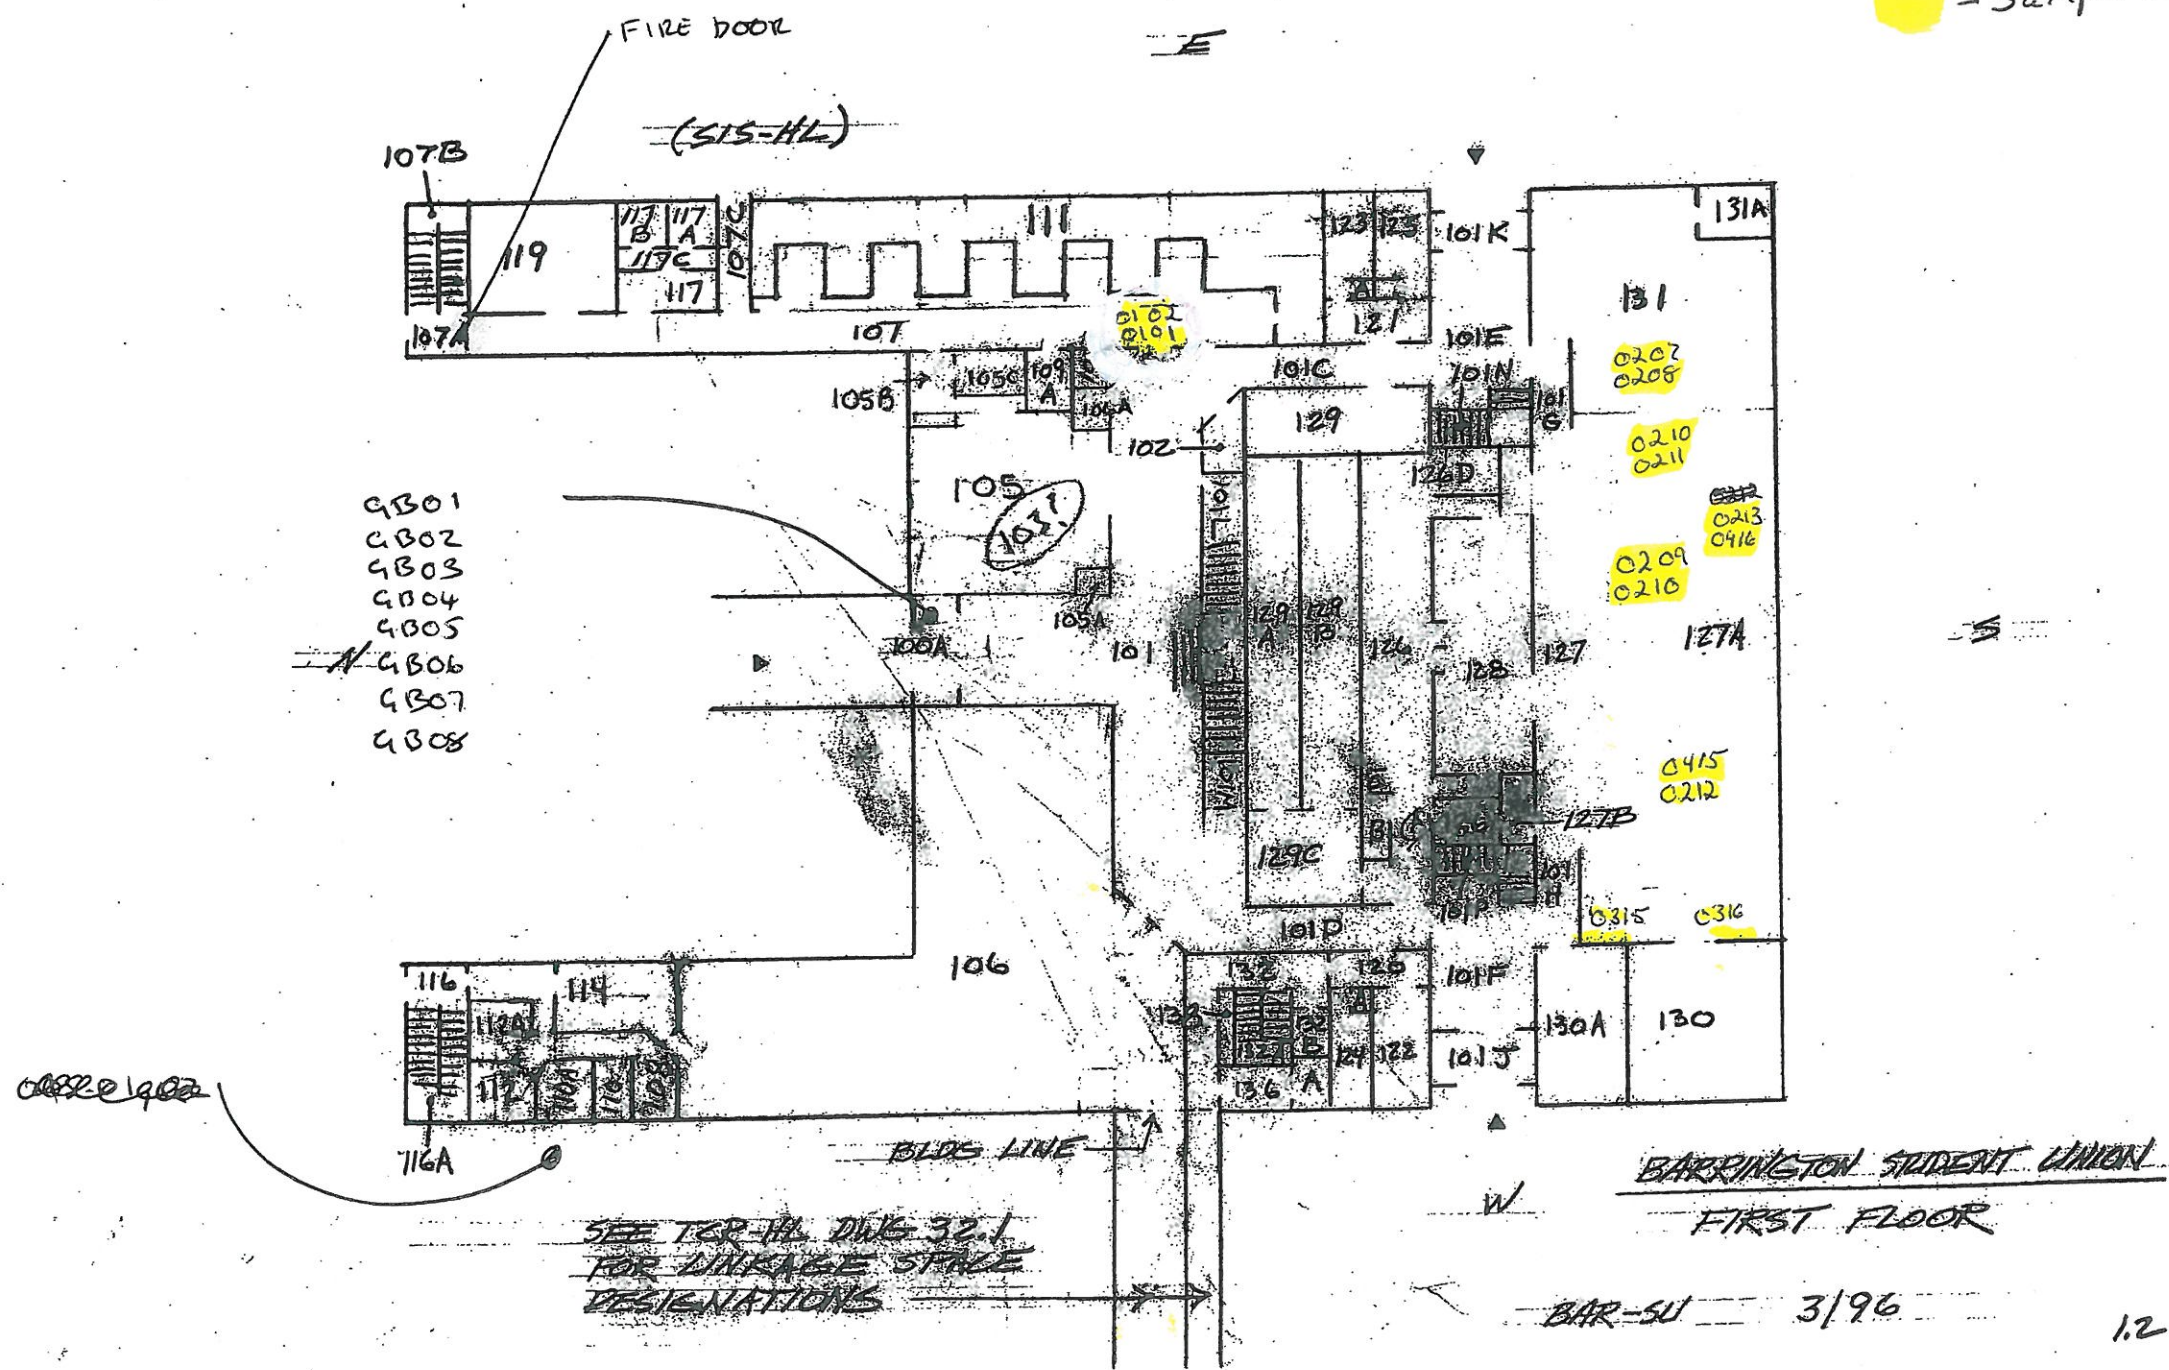


Bulk Sample Locations

● - Sample locations

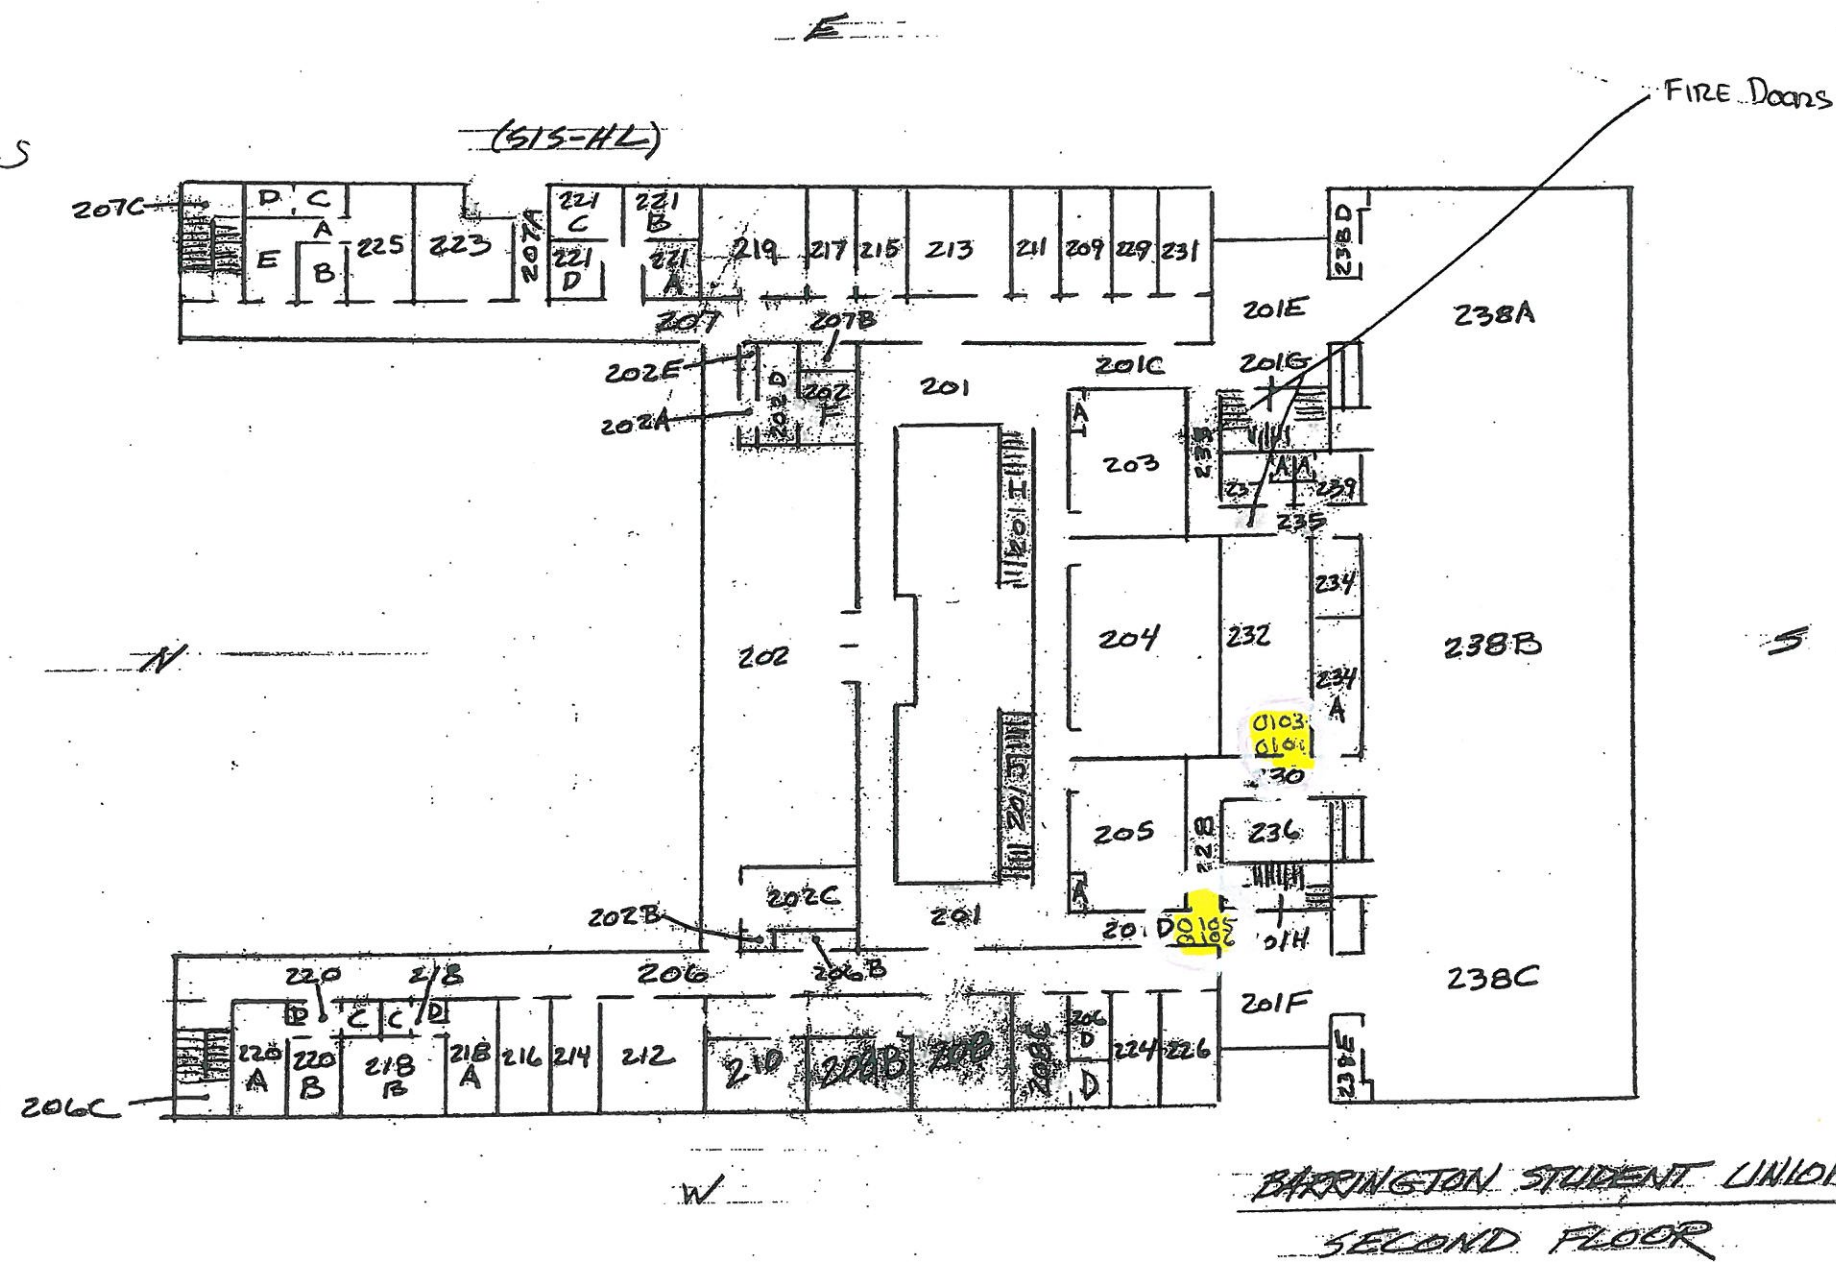


BAR-SU 6/98

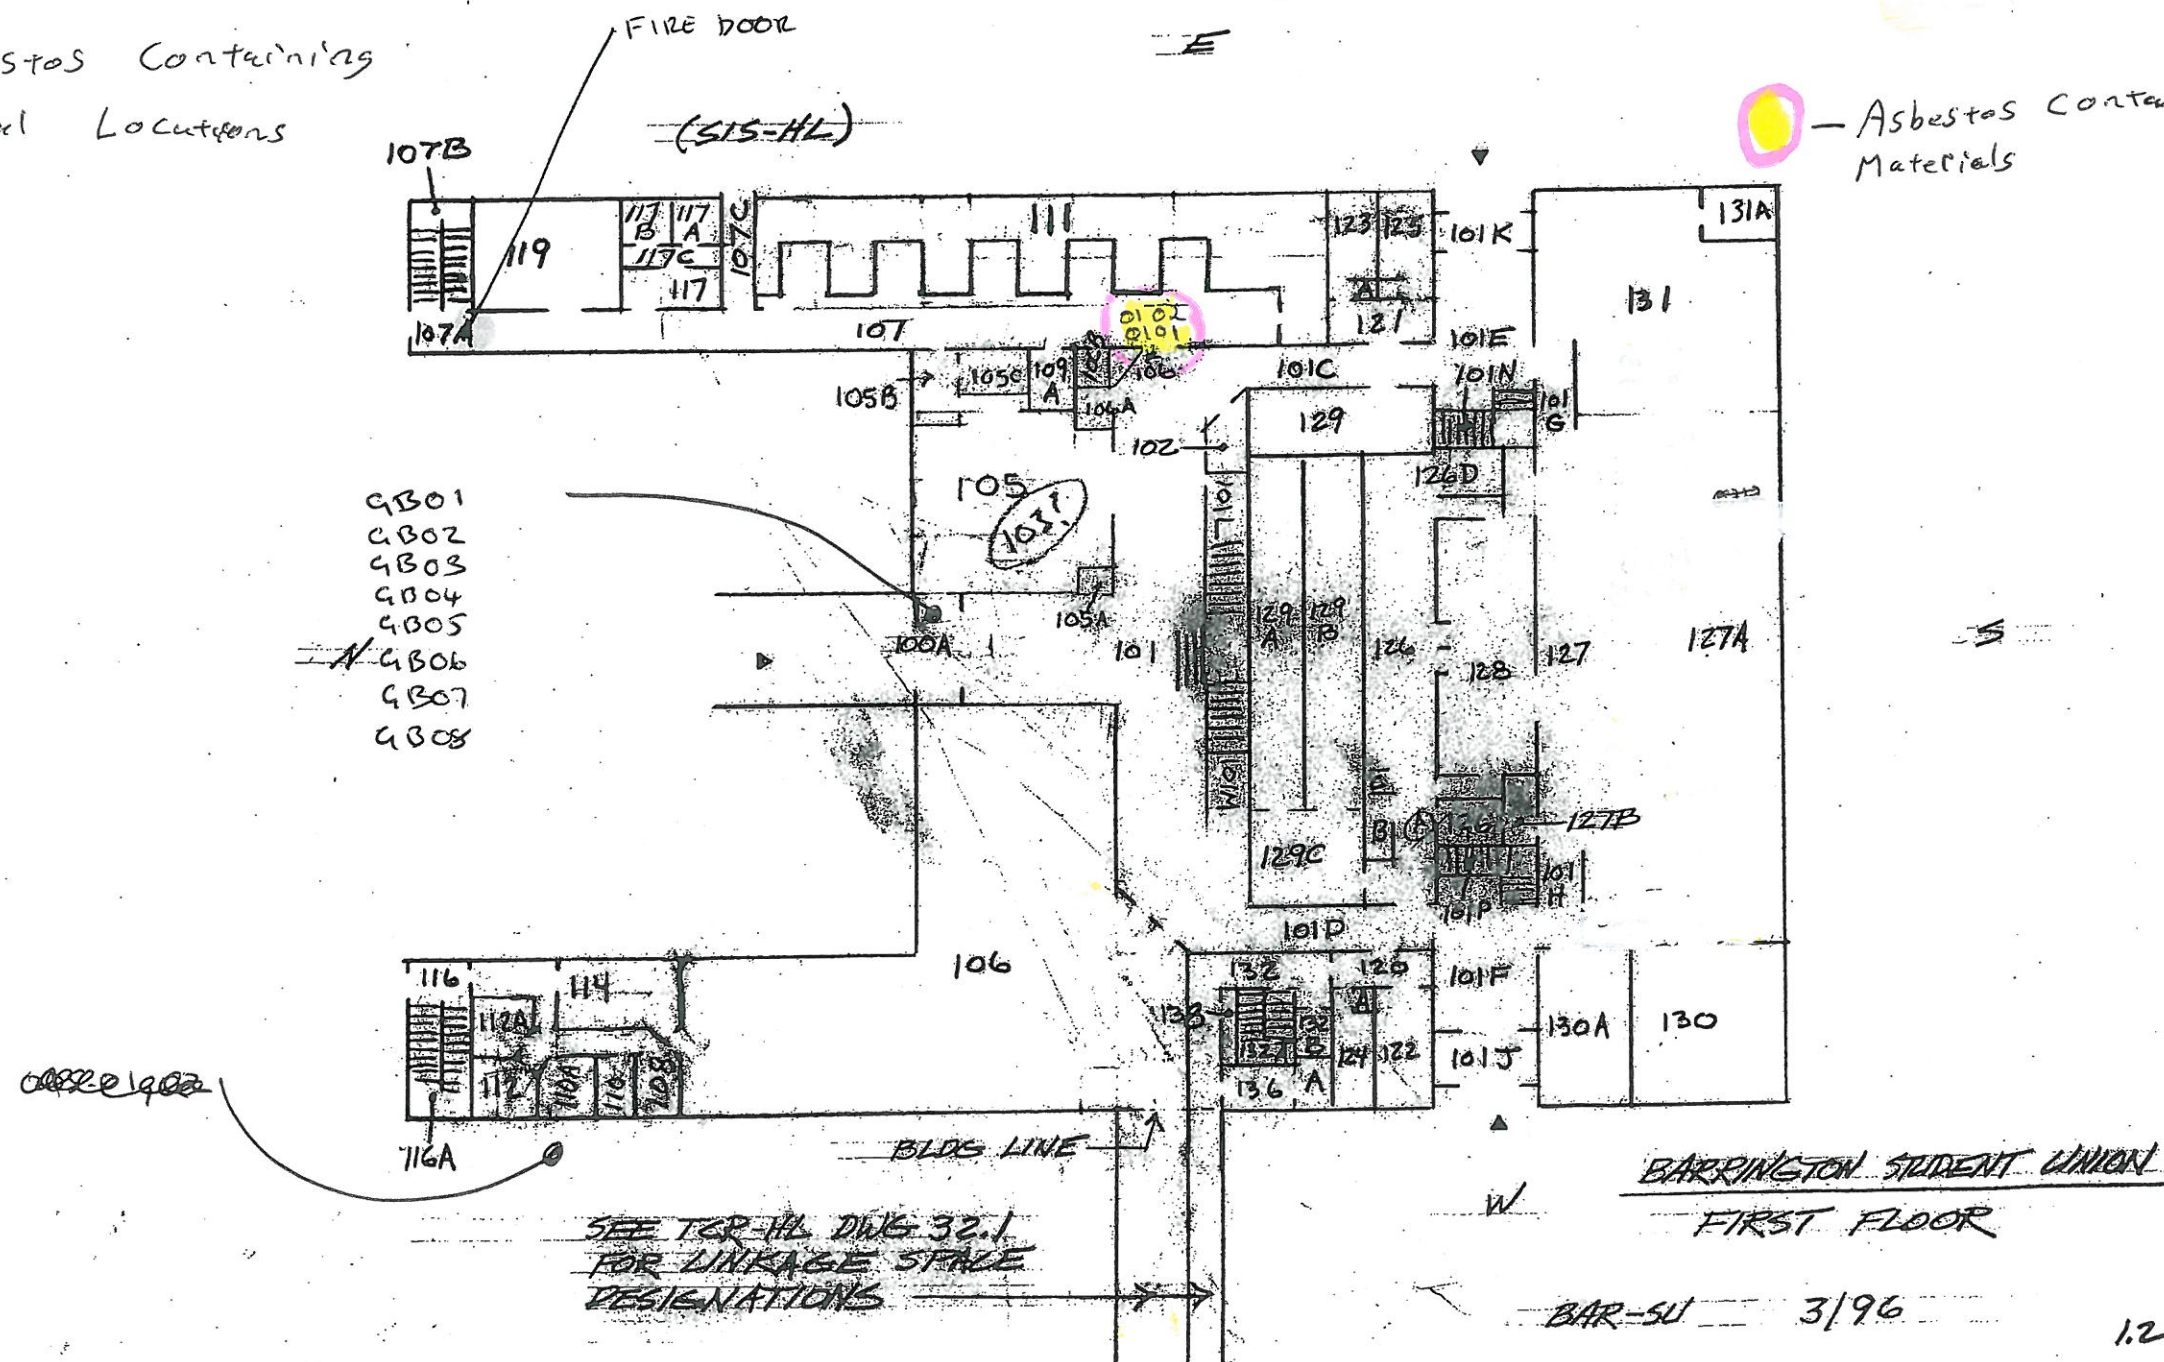 - Asbestos containing materials

• FIRE Doors

(SIS-AL)

 - Asbestos containing materials

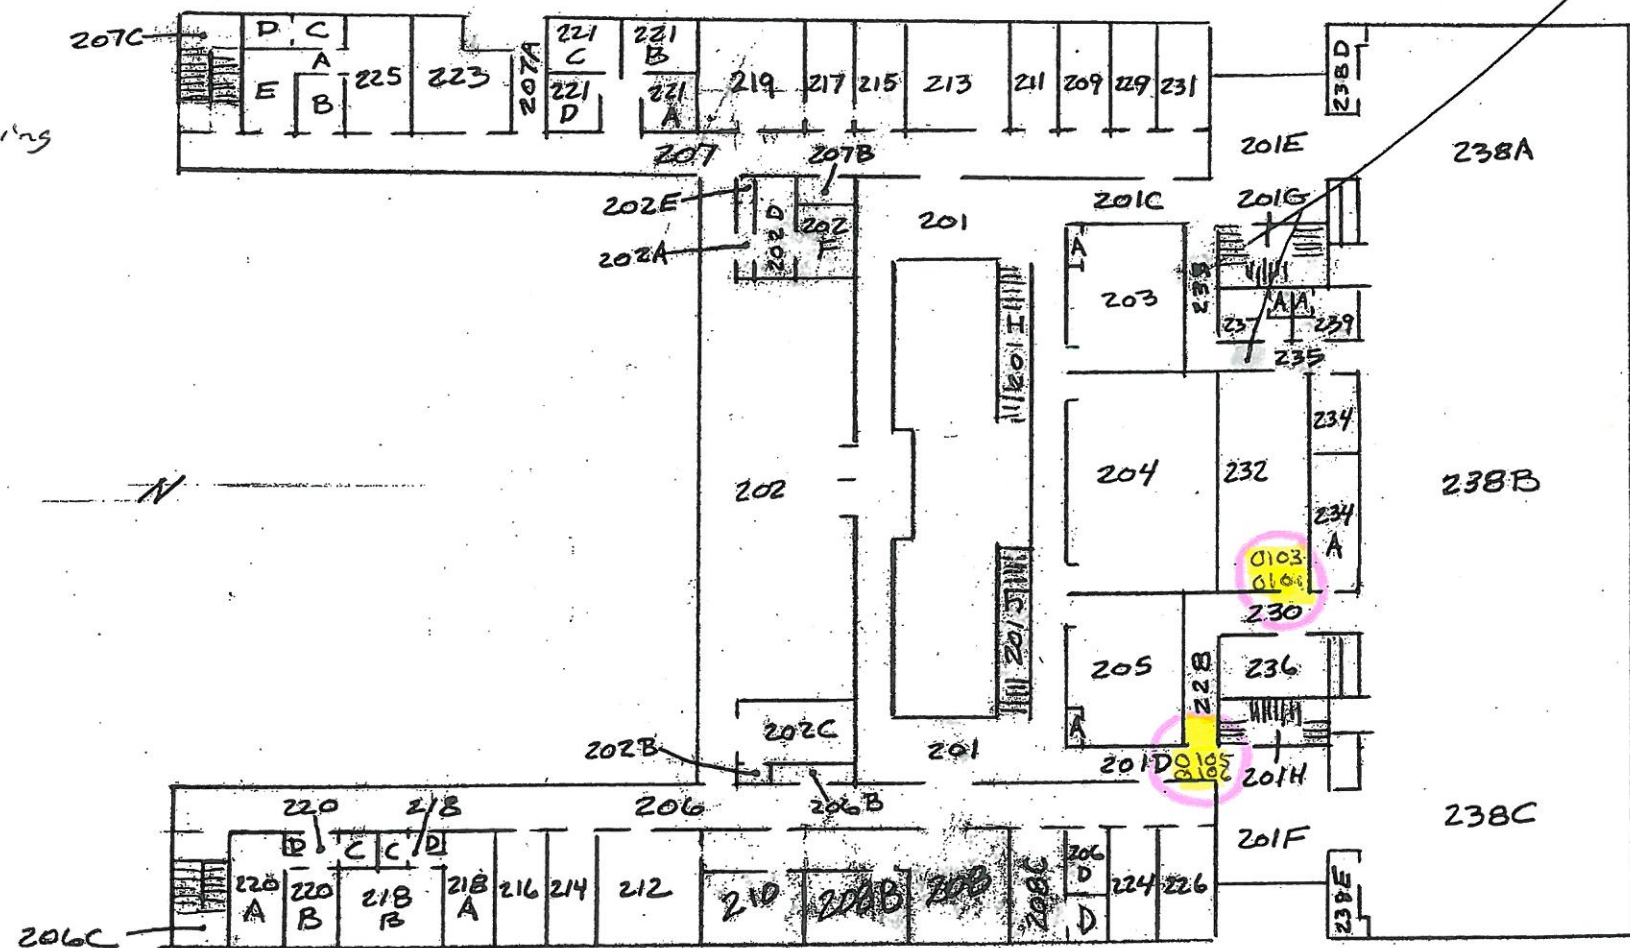

5

BARRINGTON STUDENT UNION

SECOND FLOOR

BAR-SU 6/98